


RoHS

REV	ECN NO.	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.24

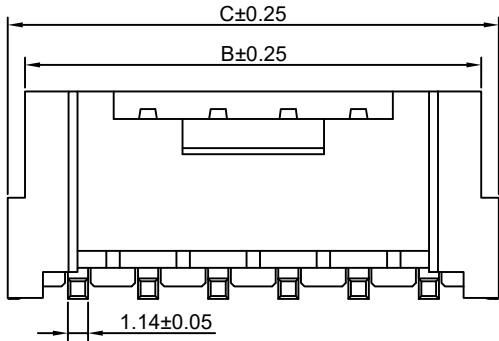



SPECIFICATIONS

- Current rating: 7A
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 20mΩ Max.


Material:
Insulator Material:LCP UL94V-0
Contact Material:Brass
Contact Plating:Tin-Plated
Mate with XFCN P3960 series Housing

Ordering Code:
M3960VS-XX-LP-R
1 2 3 4

- 1.序列号
2.Pin位数: 02-12P
3.LP:塑胶LCP
4.R: 卷装

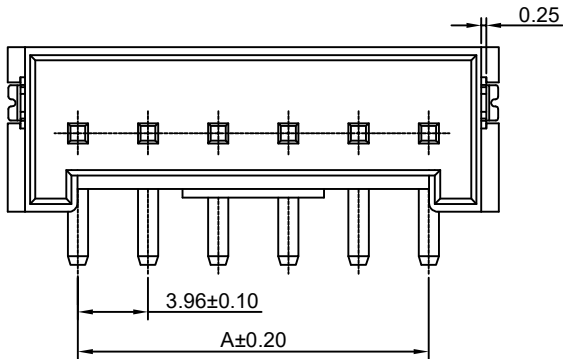

No.of PIN/ROW	Dimension		
	A	B	C
02	3.96	9.90	11.88
03	7.92	13.86	15.84
04	11.88	17.82	19.80
05	15.84	21.78	23.76
06	19.80	25.74	27.72
07	23.76	29.70	31.68
08	27.72	33.66	35.64
09	31.68	37.62	39.60
10	35.64	41.58	43.56
11	39.60	45.54	47.52
12	43.56	49.50	51.48

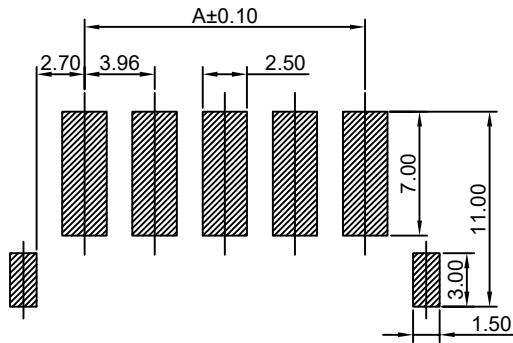

PCB LAYOUT

X.±0.50	X.°±	PART NO: M3960VS-XX-LP-R	XFCN 兴飞连接器		
.X±0.25	.X°±				
.XX±0.15	.XX°±	TITLE: 3.96mm Crimp Style Connectors	0769-82001899		
.XXX±0.10	.XXX°±		www.xfconn.com		
UNITS:	mm	DWG NO:			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang	VIEW	
		CHKD	Liu Wei		
		DRAW	Chen HongJiang	SCALE	SHEET
		DATE	2024.08.01	NONE	1/1
				REV	A1